

Insulated container CARGO 900

3/3/2023 rev0

80x120



ATP



Insulated container for the transport of products at temperature-controlled














- Brand: MELFORM
- Country of origin: ITALY
- Customs code: 39231090
- ATP Certificate
- Compatible with food contact
- Color: melange grey/blue
- Capacity: 900 liters.
- Technology: rotomoulding
- Warranty: 24 months
- Fully recyclable at the end of its operational life.

MANUFACTURING MATERIALS







Polyethylene	internal and external walls of the container and door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door, free of CFC and HCFC
Silicone rubber	gasket	Nylon	wheels
Aluminium	Hinge rod	Stainless steel	handling handles, closing handle, inner door rod, corner door reinforcement
Galvanized steel	wheel support		

Model	Code	EAN code	Ext. dim. (mm)	Int. dim. (mm)	Capacity (liters)	Weight (kg)
Cargo 900 with wheels	09000037	8022949102807	800x1200xh1835	600x985xh1460	900	111
Cargo 900 with feet	09009066	8022949122218	800x1200xh1790	600x985xh1460	900	111
Cargo 900 with pallet	09000074	8022949104238	800x1200xh1790	600x985xh1460	900	137


PRODUCT FEATURES

	<p>Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake). Wheel support plate integrated in the container.</p>		<p>Version on pallet with galvanized steel frame at 6 feet of h 120 mm. Version on 4 feet in galvanized steel h 120mm.</p>
	<p>1 housing seat of the grids positioned 805mm from the bottom of the container.</p>		<p>Folding plastic grid (on request); it can be folded on the wall of the container when not in use.</p>
	<p>Stainless steel grid for load sharing (on request)</p>		<p>Card holder (on request) for identification of content or destination. Suitable for A5 format documents.</p>
	<p>Available specific version for transporting fish with expansion cap to allow the evacuation of the ice melt water of the fish.</p>		<p>Available (on request) collect - drops to collect the melt water of the ice of the fish.</p>
	<p>Safety retainer kit for eutectic plates.</p>		<p>Internal temperature controllable thanks to the thermometer that can be inserted into the door (on request).</p>
	<p>Fresh, frozen and frozen plus eutectic plates are available to increase thermal maintenance performance over time.</p>	<p>CO₂</p>	<p>Prepared for the use of the cryogenic refrigeration system Cryo Power Box.</p>
	<p>RFID systems for traceability</p>		<p>Available (on request) USB datalogger to record temperature data during transport.</p>

PRODUCT FEATURES

	<p>Internal grooves to grant a proper air circulation.</p>		<p>Door can be opened up to 270° with a tab-type door.</p>
	<p>Door sealing gasket easily removable.</p>		<p>Stainless steel rod with 2 hooks.</p>
	<p>Stainless steel reinforcement on the door to ensure greater strength and stability.</p>		<p>Handle prepared for the use of tamper-evident system.</p>
<p>K</p>	<p>Overall heat transfer coefficient: K=0.33 W/m²K</p>	<p>°C</p>	<p>Guaranteed for use: from -30°C to +100°C.</p>

TECHNICAL DATA (mm)

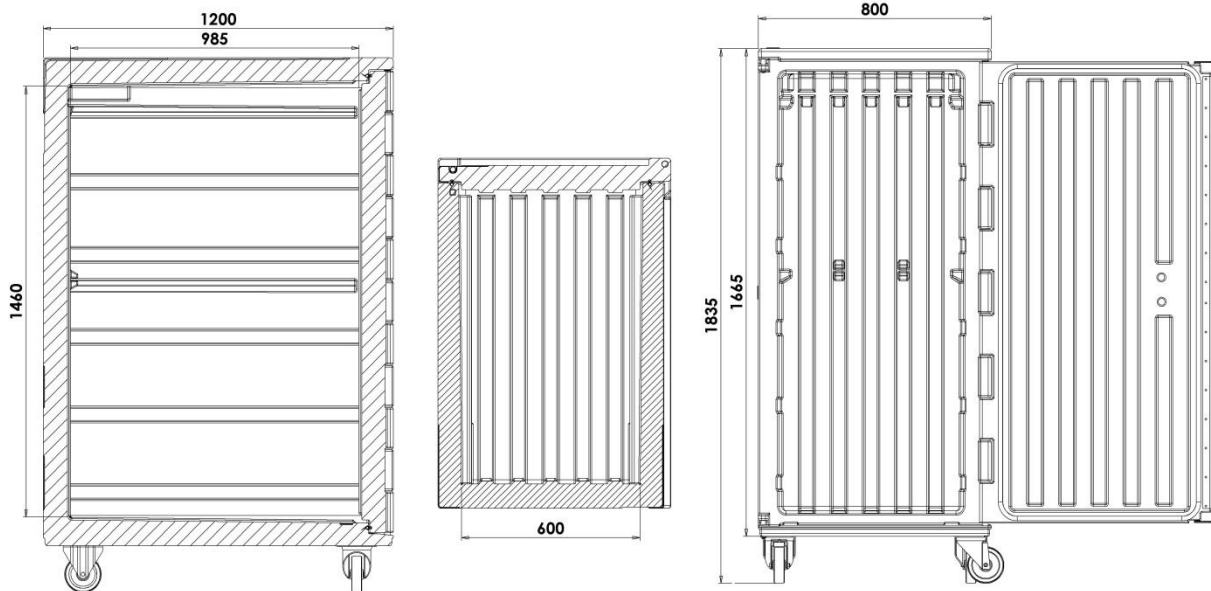

ACCESSORIES						
Model	Code	Color	Ext. DIM. (mm)	Int. dim. (mm)	Capacity (liters)	Weight (kg)
Card holder	AMC101	transparent	173xh200	148xh210 -A5-		
Grid Stainless steel	AEA010		625x970xh16			6,2
Folding grid plastic	PAPE0003		604x923xh20			1,9
Eutectic plate Fresh +3°C - 2 x Cargo -	PE900001	rose	600x487xh50			10
Eutectic plate Frozen - 21°C - 2 x Cargo -	PE900002	blue	600x487xh50			10
Eutectic plate Frozen Plus - 21°C - 2 x Cargo -	PE900908	green	600x487xh50			10
Data logger USB	AFG007		80x33xh14			
FISH TRANSPORT CONFIGURATION						
Container Cargo 900 fish version	09000073					
Stainless steel grid base	AEA027					
Drip collector	3518					
Breakwater grid	AEA028					